### SUBMITTAL: MODEL TMS™ STAINLESS STEEL FLUSH ACCESS PANELS

#### **PAGE 1 OF 2**

Model TMS is an all purpose stainless steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. Use the TMS for hospital and restaurant applications. The 1" frame flange adds rigidity and conceals the rough wall openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing and results in a door always closing square in place.

# **SPECIFICATIONS**

**Frame:** 18 gauge, stainless steel with 1" wall flange. 1-5/8" depth.

**Door:** 16 gauge, stainless steel mounted with 90° continuous, concealed stainless steel hinge.

Finish: 304 stainless, #4 Satin finish.

Lock: Flush screwdriver-operated steel cam - C. Sizes: Minimum 6" x 6", maximum 48" x 48"

#### STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:

For sizes not shown on chart. \_\_\_\_\_" W x \_\_\_\_\_" H (See sizes above)

#### STEP 2: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:

- 14 gauge door with 16 gauge frame
- \_ 16 gauge door with 14 gauge frame
- 16 gauge door with 16 gauge frame
- 14 gauge door with 14 gauge frame

#### STEP 3: SELECT OPTIONS AT ADDITIONAL COST

- Plexiglass view window
- Rain Hood
- Gasketing
- Removable Door (no hinges)
- Stainless 316 Finish
- (L) Cylinder lock installed
- (M1) Mortise cam lock prep:1-1/8" Ø,1-1/4" length
- (M2) Mortise cam lock (06431) installed
- #0646 Brass Retaining Ring for M1 (may be required for locks by others)

- (U3) Mortise slam lock prep
- (U4 Mortise slam lock (06431) installed
- (B1) Mortise deadbolt prep
- (B2) Mortise deadbolt lock (06441) installed
- (C5) Knob cam View Lock Options Online
- (C2) Torx head cam
- (C4) Hex head cam
- (C3) Spanner head cam
- Other 1-1/8" dia. mortise cylinder by request Note details here:



Standard Cam Latch

## Order Format Example: TMS-2424C

TMS -

Width Height Lock

Options (C Std or **Optional** Lock/Latch Code)

Please Note - Lock Option Codes have Changed.

#### LATCH AND LOCK OPTIONS

**Mortise Lock** Cylinder (M2) (U4) (B2) Lock (L)





Spanner Head Cam (C3)

**Hex Head** Cam (C4)

**Knob Cam** (C5)









© 2020 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.






\*DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING\*

TMS™ IS A TRADEMARK OF ACPG

Distributor: Quantity: Approved By: Contractor: Model #: Architect: Date: Project:

HEADQUARTERS:9702 NEWTON AVE S, BLOOMINGTON, MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: MANY WAREHOUSES NATIONWIDE OMAHA NE, FARGO 6/4/2020

	A-Model Size = Door Size	B-Outside Frame Dimensions 1" Trim Flange		C-Wall Opening Dimensions Fits ± 1/8" Opening Size		Approx. Ship Wt.	Latch(es)	
Qty	Width X Ht	Width	Height	Width	Height	(lbs)		
	6" x 6"	8"	8"	6 1/2"	6 1/2"	4	1	
	8" x 8"	10"	10"	8 1/2"	8 1/2"	4	1	
	8" x 12"	10"	14"	8 1/2"	12 1/2"	6	1	
	10" x 10"	12"	12"	10 1/2"	10 1/2"	6	1	
	12" x 12"	14"	14"	12 1/2"	12 1/2"	7	1	
	12" x 16"	14"	18"	12 1/2"	16 1/2"	9	1	
	12" x 18"	14"	20"	12 1/2"	18 1/2"	10	1	
	12" x 24"	14"	26"	12 1/2"	24 1/2"	12	2	
	14" x 14"	16"	16"	14 1/2"	14 1/2"	9	1	
	16" x 16"	18"	18"	16 1/2"	16 1/2"	11	1	
	16" x 20"	18"	22"	16 1/2"	20 1/2"	13	2	
	18" x 18"	20"	20"	18 1/2"	18 1/2"	20	3	
	20" x 24"	22"	26"	20 1/2"	24 1/2"	15	4	
	20" x 30"	22"	32"	20 1/2"	30 1/2"	20	4	
	22" x 22"	24"	24"	22 1/2"	22 1/2"	17	4	
	22" x 30"	24"	32"	22 1/2"	30 1/2"	22	4	
	22" x 36"	24"	38"	22 1/2"	36 1/2"	24	5	
	24" x 24"	26"	26"	24 1/2"	24 1/2"	18	4	
	24" x 30"	26"	32"	24 1/2"	30 1/2"	22	5	
	24" x 36"	26"	38"	24 1/2"	36 1/2"	25	5	
	30" x 30"	32"	32"	30 1/2"	30 1/2"	30	5	
	36" x 36"	38"	38"	36 1/2"	36 1/2"	41	5	
	36" x 48"	38"	50"	36 1/2"	48 1/2"	51	6	
	Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above For Example 16-1/4", 16-1/2" or 16-3/4" Minimum Size 6" x 6", Max Size 48" x 48"							

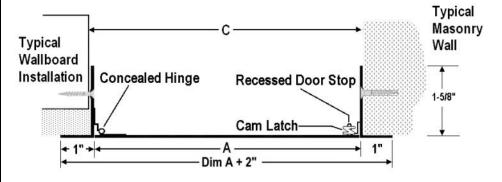

Models in Bold Above are Stocked in one or more of our Locations