

# SUBMITTAL: MODEL TM™ FLUSH ACCESS PANELS WITH DOUBLE DOORS

TM double door access panels give you easier access to vital components of plumbing, heating, air conditioning and/or electrical systems. The exposed 1" frame flange adds rigidity and conceals rough wall openings, and the removable center mullion is attached by screws at each end. Large size doors may include stiffeners to retain door rigidity.

**SPECIFICATIONS**

**Frame:** 16 gauge steel with 1" wall flange. 1-5/8" depth. Removable center mullion attached by 2 screws at top and bottom.

**Door:** 16 gauge steel mounted with 90° continuous, concealed hinge.

**Finish:** White powder coat paint.

**Locks & Latches:** Flush screwdriver-operated steel cams in all positions, except when (L) Cylinder lock is selected. When no latch is in center position, lock or prep is installed in the center position on right panel in addition to the latches designated for that size panel.

**Sizes:** Walls up to 48" x 60", Ceilings up to 36" x 36". Other size restrictions apply, so consult customer service for sizes not shown.

**STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:**


\_\_\_\_\_ For sizes not shown on chart. \_\_\_\_\_" W x \_\_\_\_\_" H (See sizes above)

**STEP 2: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:**

- \_\_\_\_\_ Cold Rolled Steel 14 gauge door with 16 gauge frame
- \_\_\_\_\_ Cold Rolled Steel 16 gauge door with 14 gauge frame
- \_\_\_\_\_ Cold Rolled Steel 16 gauge door with 18 gauge frame
- \_\_\_\_\_ Cold Rolled Steel 14 gauge door with 14 gauge frame
  
- \_\_\_\_\_ Galvanneal Steel (TMG) 16 gauge door and 16 gauge frame
- \_\_\_\_\_ Galvanneal Steel (TMG) 14 gauge door with 16 gauge frame
- \_\_\_\_\_ Galvanneal Steel (TMG) 16 gauge door with 14 gauge frame
- \_\_\_\_\_ Galvanneal Steel (TMG) 14 gauge door with 14 gauge frame
  
- \_\_\_\_\_ 304 Stainless Steel (TMS) 14 gauge door with 16 gauge frame
- \_\_\_\_\_ 304 Stainless Steel (TMS) 16 gauge door with 14 gauge frame
- \_\_\_\_\_ 304 Stainless Steel (TMS) 14 gauge door with 14 gauge frame



Standard Cam Latch

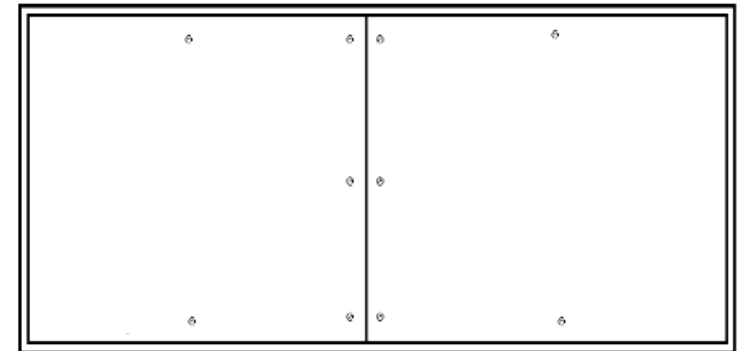


**STEP 3: SELECT OPTIONS AT ADDITIONAL COST**


- |   |  |
|---|--|
| <input type="checkbox"/> Plexiglass view window   | <input type="checkbox"/> (C5) Knob cam   |
| <input type="checkbox"/> Louvered vents (n/a stainless) attach louvered door selector   | <input type="checkbox"/> (C2) Torx head cam <a href="#">View Lock Options Online</a> |
| <input type="checkbox"/> Optional color code _____ from page 2 or website               | <input type="checkbox"/> (C4) Hex head cam   |
| <input type="checkbox"/> 316 Stainless Construction (Select one stainless option above) | <input type="checkbox"/> (C3) Spanner head cam                                       |
|   | <input type="checkbox"/> (L) Cylinder lock installed.                                |

**LATCH AND LOCK OPTIONS**

Mortise Lock (M2)(U4)(B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

 <p><b>DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING</b> TM™ IS A TRADEMARK OF ACTIVAR</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date: <span style="float: right; font-size: small;">© 2020 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.</span>
HEADQUARTERS: 9702 NEWTON AVE S, BLOOMINGTON, MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: FORT MYERS FL, DALLAS TX, LANCASTER PA, ATLANTA GA, CHICAGO, IL, SEATTLE WA, OMAHA NE, FARGO ND <b>5/26/2020</b>		


# SUBMITTAL: MODEL TM™ FLUSH ACCESS PANELS WITH DOUBLE DOORS

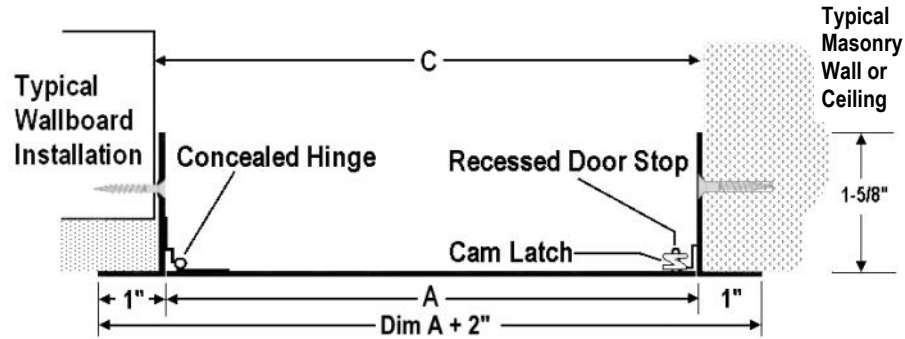

Qty	A-Model Size = Door Size	B-Outside Frame Dimensions 1" Trim Flange		C-Opening Dimensions Fits ± 1/8" Opening Size		Total Latches	Latches Per Door V = Vertical H = Horizontal
	Width X Ht	Width	Height	Width	Height		
<b>STANDARD SIZES WALLS &amp; CEILINGS (OTHER SIZES AVAILABLE)</b>							
	24 x 36	26	38	24 1/2	36 1/2	6	3V
	24 x 48	26	50	24 1/2	48 1/2	8	4V
	24 x 60	26	62	24 1/2	60 1/2	10	5V
	36 x 36	38	38	36 1/2	36 1/2	6	3V, 2H
<b>STANDARD SIZES WALLS ONLY BELOW</b>							
	36 x 48	38	50	36 1/2	48 1/2	12	4V, 2H
	36 x 54	38	56	36 1/2	54 1/2	14	5V, 2H
	48 x 24	50	26	48 1/2	24 1/2	8	2V, 2H
	48 x 30	50	32	48 1/2	30 1/2	10	3V, 2H
	48 x 36	50	38	48 1/2	36 1/2	10	3V, 2H
	48 x 48	50	50	48 1/2	48 1/2	12	4V, 2H
	48 x 60	50	62	48 1/2	60 1/2	16	6V, 2H
						TBD	TBD
<p>Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above                      For Example 16-1/4", 16-1/2" or 16-3/4"                      Walls up to 48" x 60", Ceilings up to 36" x 36".</p>							



**View of Removable Mullion from Underside of Access Panel**

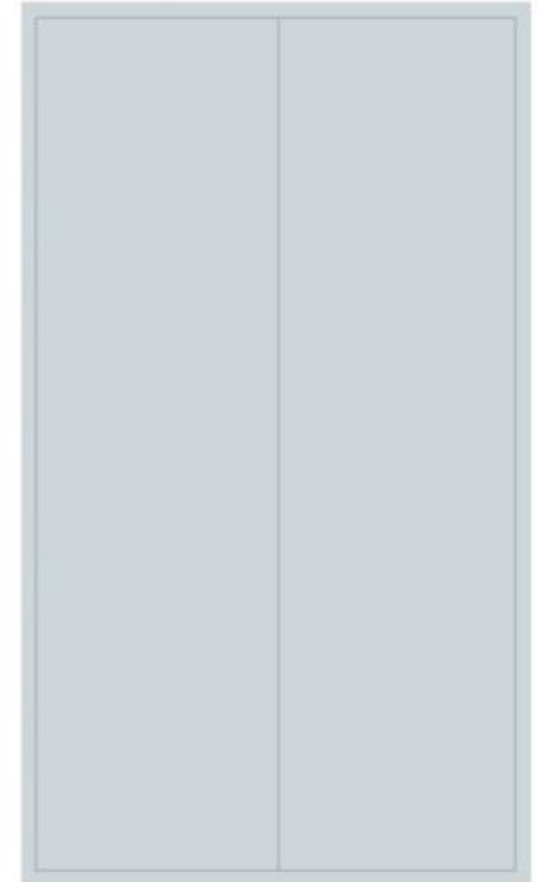

**Illustration of 24 x 60 (10 latches)**

Standard Color is White, Optional Colors at Additional Cost - Samples Available

