

SUBMITTAL: MODEL TM™ LOUVERED FLUSH ACCESS PANELS

Louvered doors are available for models TM™ and TM double door access panels. Features an all purpose door that affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. The 1" frame flange adds rigidity and conceals the rough wall openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing.


Frame: 16 gauge steel with 1" wall flange.

Door: 16 gauge steel with 1" louvers cut into the door panel.

Finish: White powder coat paint.

Lock: Flush screwdriver-operated steel cam "C" with 1 or more on each side.

Sizes: Minimum 6" x 6", maximum 48" x 48". Other size restrictions apply, so consult customer service for sizes not shown

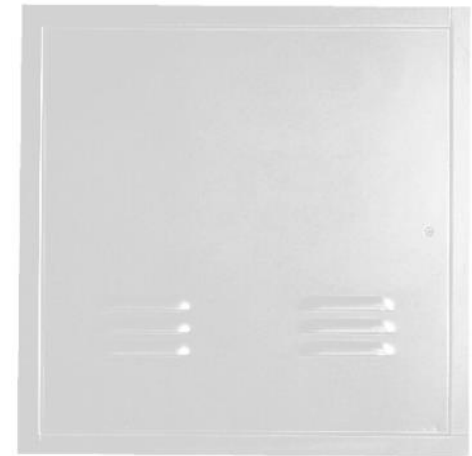

Standard Cam Latch

STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE OF SINGLE DOOR ACCESS PANELS:

- For TM or TMG sizes not shown on chart. ____" W x ____" H (See sizes above)
- For TM Double Door panels, please attach Double Door submittal along with this submittal

STEP 2: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:

(complete for single door access panels only)


- Cold Rolled Steel 16 gauge door with 14 gauge frame
- Galvanneal Steel (Model TMG) 16 gauge door and 16 gauge frame
- Galvanneal Steel (Model TMG) 16 gauge door with 14 gauge frame

STEP 3: SELECT OPTIONS AT ADDITIONAL COST:

- | | |
|---|---|
| <input type="checkbox"/> Double door - attach separate submittal to this page | <input type="checkbox"/> (M2) Mortise cam lock (06431) installed |
| <input type="checkbox"/> Rain Hood | <input type="checkbox"/> (U3) Mortise slam lock prep |
| <input type="checkbox"/> Removable Door | <input type="checkbox"/> (U4) Mortise slam lock (06431) installed |
| <input type="checkbox"/> Optional Color Code ____ See page 2 | <input type="checkbox"/> (B1) Mortise deadbolt prep |
| <input type="checkbox"/> (L) Cylinder lock installed | <input type="checkbox"/> (B2) Mortise deadbolt lock (06441) installed |
| <input type="checkbox"/> (M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length | <input type="checkbox"/> (C5) Knob cam |
| <input type="checkbox"/> Insect Screen | <input type="checkbox"/> (C2) Torx head cam |
| <input type="checkbox"/> #0646 Brass retaining ring for mortise prep
(may be required for locks by others) | <input type="checkbox"/> (C4) Hex head cam |
| <input type="checkbox"/> Other 1-1/8" dia. mortise cylinder by request: ____ | <input type="checkbox"/> (C3) Spanner head cam |
| | <input type="checkbox"/> Gasketed door |

LATCH AND LOCK OPTIONS


Mortise Lock (M2) (U4) (B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

 <p style="text-align: center;">TM™ IS A TRADEMARK OF ACPG PLEASE DOWNLOAD MOST CURRENT SUBMITTAL FROM WEBSITE BEFORE ORDERING</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:
HEADQUARTERS: 9702 NEWTON AVE S, BLOOMINGTON, MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: SEE WEBSITE FOR LOCATIONS 4/6/2021		

STANDARD SIZES OF SINGLE DOOR TM ACCESS PANELS

Qty	A-Model Size = Door Size	B-Outside Frame Dimensions 1" Trim Flange		C-Wall Opening Dimensions Fits ± 1/8" Opening Size		Approx. Ship Wt. (lbs)	Latch(es)
	Width X Ht	Width	Height	Width	Height		
	6" x 6"	8"	8"	6 1/2"	6 1/2"	4	1
	8" x 8"	10"	10"	8 1/2"	8 1/2"	4	1
	8" x 12"	10"	14"	8 1/2"	12 1/2"	6	1
	10" x 10"	12"	12"	10 1/2"	10 1/2"	6	1
	12" x 12"	14"	14"	12 1/2"	12 1/2"	7	1
	12" x 16"	14"	18"	12 1/2"	16 1/2"	9	1
	12" x 18"	14"	20"	12 1/2"	18 1/2"	10	1
	12" x 24"	14"	26"	12 1/2"	24 1/2"	12	2
	14" x 14"	16"	16"	14 1/2"	14 1/2"	9	1
	16" x 16"	18"	18"	16 1/2"	16 1/2"	11	1
	16" x 20"	18"	22"	16 1/2"	20 1/2"	13	2
	18" x 18"	20"	20"	18 1/2"	18 1/2"	20	3
	20" x 24"	22"	26"	20 1/2"	24 1/2"	15	4
	20" x 30"	22"	32"	20 1/2"	30 1/2"	20	4
	22" x 22"	24"	24"	22 1/2"	22 1/2"	17	4
	22" x 30"	24"	32"	22 1/2"	30 1/2"	22	4
	22" x 36"	24"	38"	22 1/2"	36 1/2"	24	5
	24" x 24"	26"	26"	24 1/2"	24 1/2"	18	4
	24" x 30"	26"	32"	24 1/2"	30 1/2"	22	5
	24" x 36"	26"	38"	24 1/2"	36 1/2"	25	5
	30" x 30"	32"	32"	30 1/2"	30 1/2"	30	5
	36" x 36"	38"	38"	36 1/2"	36 1/2"	41	5
	36" x 48"	38"	50"	36 1/2"	48 1/2"	51	6
	48" x 48"	50"	50"	36 1/2"	48 1/2"	60	8
	--	--	--	--	--	--	--


Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above
For Example 16-1/4", 16-1/2" or 16-3/4"
Minimum Size 6" x 6", Max Size 48" x 48"

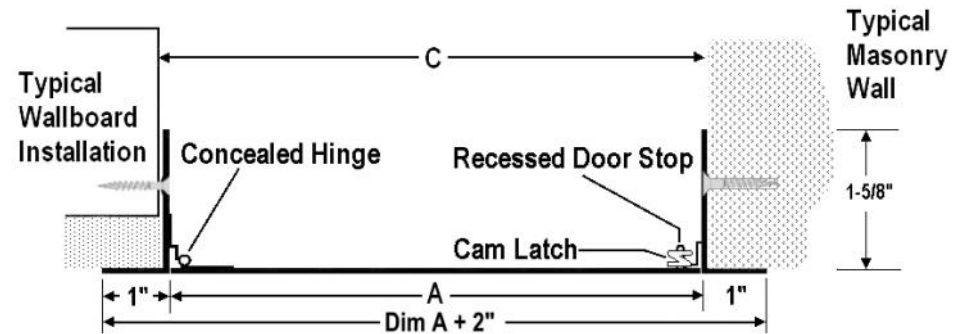


Louvers will be made in full inch increments only. Maximum continuous width of blades—12".

Columns and rows will be separated by a 2" space. Minimum width of louver to door edge will be 2-1/2" on all sides.

If bug screen or stiffeners are required, the distance from the edge of the door to the first louver will be 4 1/2".

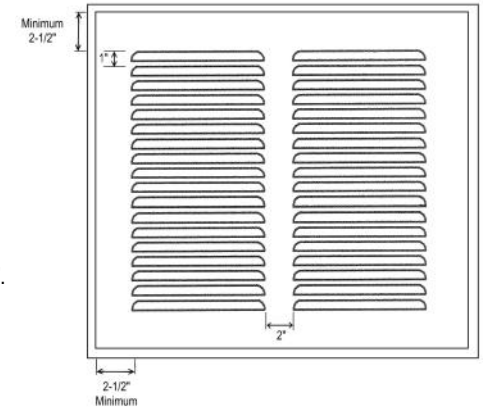

Detail of Louver Profile

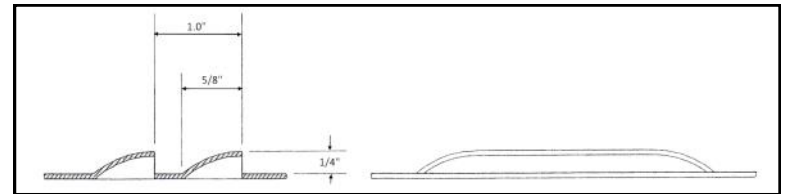

Standard Color is White, Optional Colors at Additional Cost - Samples Available



ATTACH TM DOUBLE DOOR SUBMITTAL IF NEEDED