HIGH SECURITY ACCESS DOOR
Model DSB-123SD
For All Types of Construction

WORLD'S LEADING MANUFACTURER OF ACCESS DOORS

DATE



KARP ASSOCIATES, INC.
260 Spagnoli Road, Melville, NY 11747
(631)768-8300 - Phone
(631)768-8350 - Fax

SPECIFICATIONS

GENERAL SCOPE:
Access doors shall be Karp Type DSB-123SD as manufactured by Karp Associates, Inc., Melville, N.Y. Sizes shall be as indicated on the drawings.

CONSTRUCTION:
1. Frame shall be 3/16" x 2" x 2" angle welded with joints ground smooth.
2. Door shall be 10 gage steel.
3. Hinges shall be heavy duty and welded to door and frame.
4. Locks shall be heavy duty detention type lock (or as specified). Additional locking devices shall be spanner-head cam latches welded flush to the surface of the door.
5. 1/4" mounting holes are included on al frames, masonry anchor straps are optional.
6. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel.

STANDARD SIZES


DOOR SIZE H X W (IN.)	WALL/CEILING OPENING (IN.)	SHIP WT. (LBS.)
12 x 12	12 1/2 x 12 1/2	35.0
16 x 16	16 1/2 x 16 1/2	44.0
18 x 18	18 1/2 x 18 1/2	49.0
24 x 24	24 1/2 x 24 1/2	65.0
36 x 24	36 1/2 x 24 1/2	80.0
36 x 36	36 1/2 x 36 1/2	115.0


PROJECT DATA

Project Name:
Architect:
Contractor:
Agent/Customer Name:
Tagging Instructions:
Special Instructions:

PROJECT SCHEDULE

Qty.	H	W	No. of Latches	Finish	Remarks

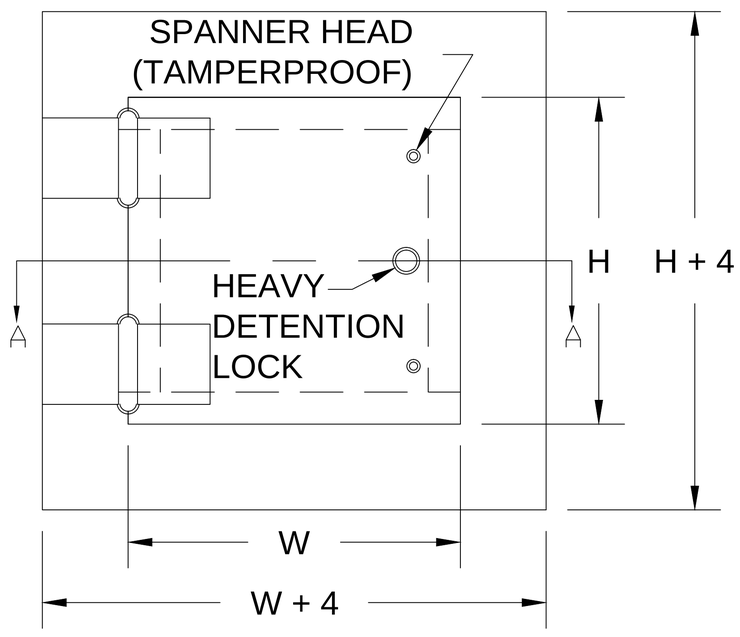

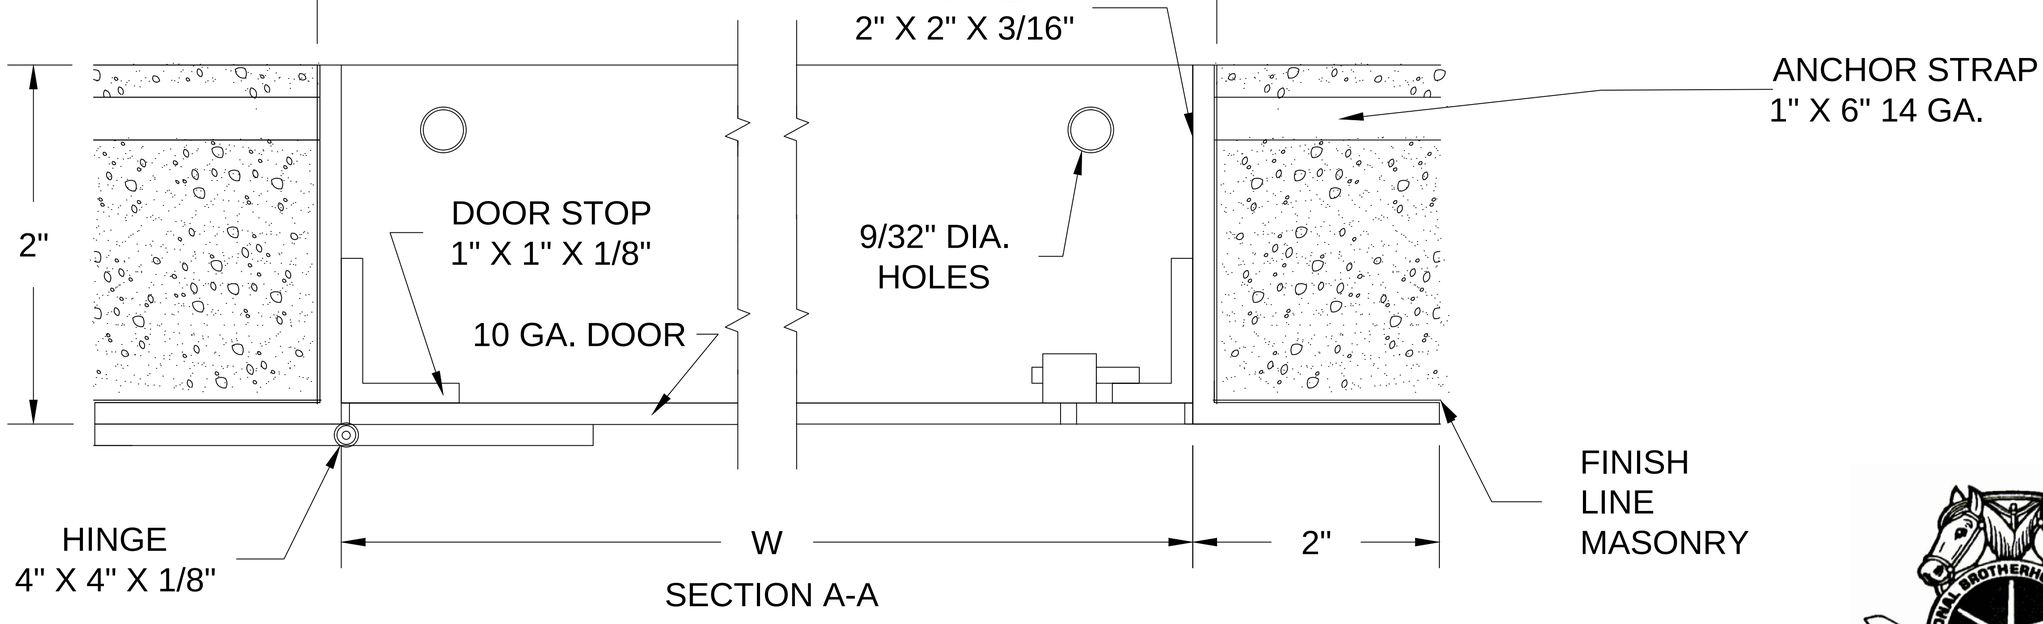

SECTION A-A

One detention key per 10 doors

Made with Union Labor