FLUSH DRYWALL ACCESS DOOR
Model KDW
For Wall and Ceilings



KARP ASSOCIATES, INC.
260 Spagnoli Road Melville, NY 11747
(631) 768-8300 - Phone
(631) 768-8350 - Fax

DATE

PROJECT DATA
Project Name:
Architect:
Contractor:
Agent/Customer Name:
Tagging Instructions:
Special Instructions:

PROJECT SCHEDULE					
Qty.	H	W	No. of Latches	Finish	Remarks

SPECIFICATIONS

GENERAL SCOPE:
Access doors shall be Karp Type KDW as manufactured by Karp Associates, Inc., Melville, N.Y.
Sizes shall be as indicated on the drawings.


CONSTRUCTION:
1. Frame shall be 16 gauge steel and door shall be 16 gauge steel. *Door shall be 14 gauge steel is larger than 9 sq. ft.
2. Trim shall be galvanized steel drywall bead.
3. Hinge shall be pin type hinge, spring loaded making door removable.
4. Latches shall be flush and screwdriver operated, or shall be key operated cylinder lock with automatic dust shutter.
5. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel.


* When hinge side is greater than 48", door shall have a continuous piano hinge for rigidity.
* Stainless Steel material is available for all sizes.

STANDARD SIZES

DOOR SIZE H X W (IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF STUD LATCHES	SHIP WT. (LBS.)
6 x 6	6 3/8 x 6 3/8	1	1.8
8 x 8	8 3/8 x 8 3/8	1	2.4
10 x 10	10 3/8 x 10 3/8	1	3.3
12 x 12	12 3/8 x 12 3/8	1	5.8
14 x 14	14 3/8 x 14 3/8	2	6.5
16 x 16	16 3/8 x 16 3/8	2	8.8
18 x 18	18 3/8 x 18 3/8	2	11.1
22 x 22	22 3/8 x 22 3/8	4	15.3
24 x 24	24 3/8 x 24 3/8	5	17.2
36 x 24	36 3/8 x 24 3/8	5	25.9

*** The wall opening size for doors larger that 48 x 36 shall be 1/2" larger than the door size.**

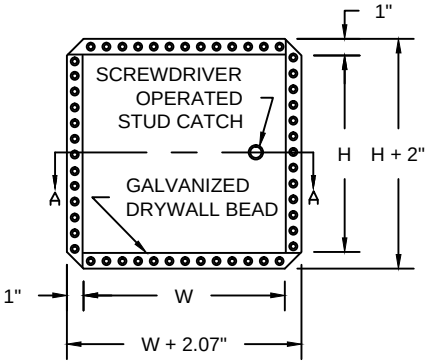

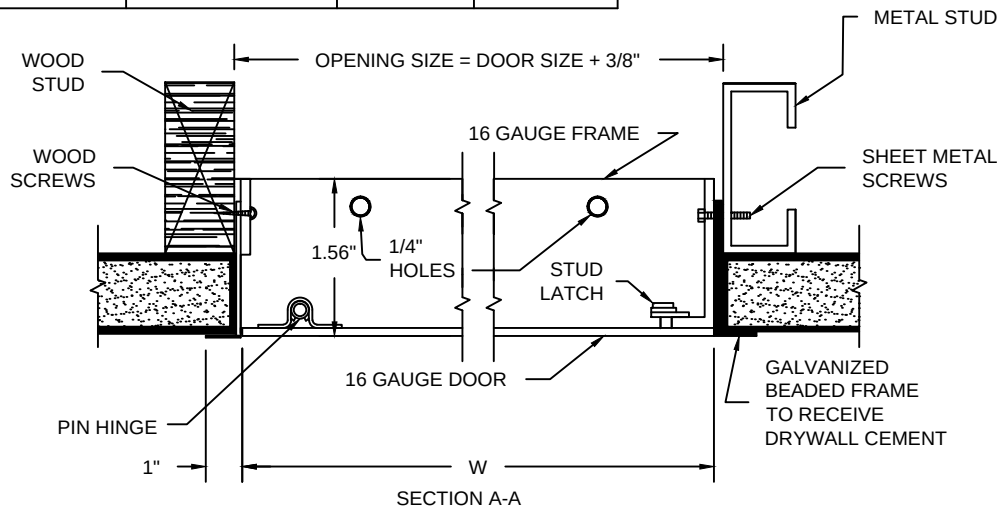

Made with Union Labor