# SUBMITTAL: MODEL CT™ FLUSH ACCESS PANELS

# An Access Panel with Recessed Door and Trimless Frame with 14 Gauge Frame.

Designed to accommodate an insert up to 1/2" thickness in the door. Acoustical tile or drywall can be attached to the door with adhesive to be flush with the surrounding tile field. A continuous hinge, located at the outside edge of the door ensures easy opening of the plaster or tile covered panel. Not to be used for suspended ceilings.

#### **SPECIFICATIONS:**


**Door Panel:** 16 gauge steel, recess to accommodate 1/2" thick insert.

Frame: 14 gauge steel

Finish: White powder coat paint.

Hinge: Recessed, continuous hinge mounted on the long side of oblong panels.

**Lock:** Flush screwdriver-operated steel cam standard "C" **Sizes:** Minimum 6" x 6" (152.4 x 152.4 mm), maximum 36"x 36"





**PAGE 1 OF 2** 

Recessed Door Accepts 1/2" Insert

#### STEP 1: SELECT MODEL NUMBER AND QUANTITY ON CHART

### **STEP 2: SELECT MATERIAL**

CT Steel

\_\_\_\_ CTG Galvanized (Additional Cost)

Please Note - Color Codes and Lock Option Codes have Changed.

#### 

## STEP 3: SELECT OPTIONAL FEATURES AT ADDITIONAL COST:

\_\_Optional color Code: \_\_\_\_\_ - see page 2

(L) Cylinder lock installed

(C2) Torx head cam

(C4) Hex head cam

(C3) Spanner head cam


(M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length

(M2) Mortise cam lock (06431) installed

14 Gauge frame and 14 gauge door



Standard Cam Latch

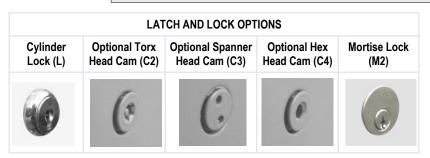



\*DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING
© 2021 ACTIVAR CONSTRUCTION PRODUCTS GROUP— CT™ IS A TRADEMARK OF ACTIVAR

Distributor:

Contractor:

Model #:

Project:

Quantity:

Approved By:

Architect:

Date:

HEADQUARTERS: 9702 NEWTON AVE S, BLOOMINGTON, MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM

MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: SEE WEBSITE FOR LOCATIONS 5/25/2021

# SUBMITTAL: MODEL CT™ FLUSH ACCESS PANELS

	A - MODEL SIZE = DOOR SIZE	B - OUTSIDE FRAME DIMENSIONS		SHIPPING WEIGHT	LATCH
QTY	WIDTH X HEIGHT	WIDTH	HEIGHT	APPROX.	(ES)
	12" x 12"	12 1/4 "	12 1/4 "	9 lbs	1
	12" x 24"	12 1/4 "	24 1/4 "	14 lbs	2
	18" x 18"	18 1/4 "	18 1/4 "	15 lbs	3
	22" x 30"	22 1/4 "	30 1/4 "	26 lbs	4
	24" x 24"	24 1/4 "	24 1/4 "	24 lbs	4
	24" x 36"	24 1/4 "	36 1/4 "	34 lbs	5
	36" x 36"	36 1/4"	36 1/4"	51 lbs	6

